


# REC Series Specifications

An extremely versatile high-powered monopoint LED retrofit for commercial recessed or can lighting: malls, airports, convention arenas, stage, auditorium, and much more. 20, 45, & 90W units mount to 0.80 aluminum adapter plates that have been custom cut to fit your fixture. Reflectors are available in Wide (W), Medium (M), Narrow (N), and Very Narrow (VN), for low to high heights.

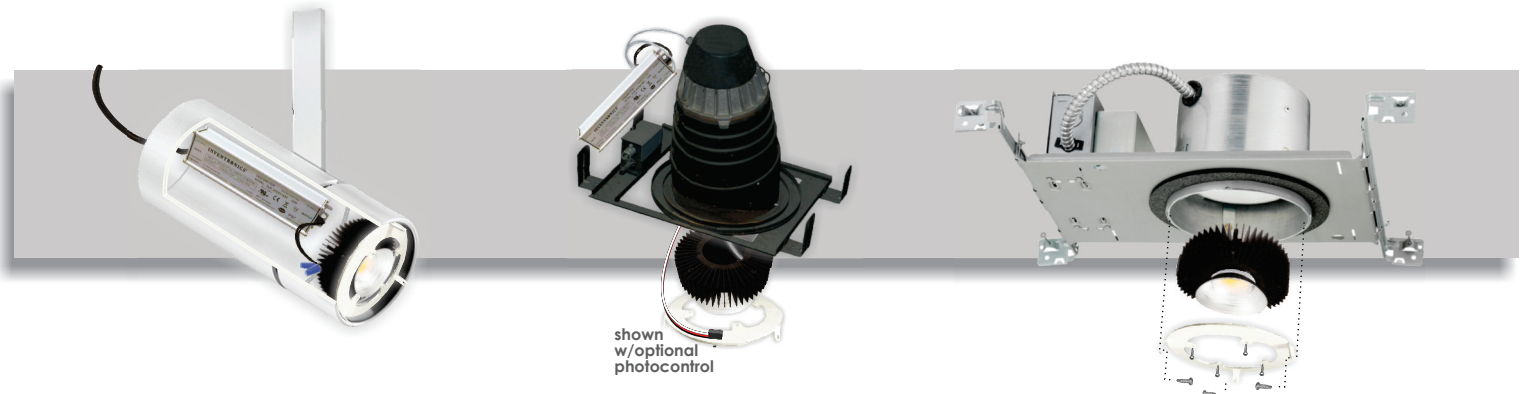

**Available Color Temps (K):** 2700, 3000, 3500, 4000, and 5000

**CRI:** 2700 thru 4000: 83+ 5000: 92+

**Lifetime (L70):** >250,000

**LED Source:** Bridgelux Vero Series  
efficacy at 130 lm/W

**Power Supply:** Inventronics 0-10V, 120-277VAC (480V optional), 50/60Hz dimming driver with a -35 C (-30 F) to 70 C (158 F) ambient operating temperature range. 5 year warranty

**Compliance:** ETL, UL 1598, 1598B, 1598C

**Warranty:** 10 years


## AVAILABLE LIGHT DISPERSIONS

Wide (W)

Medium (M)

Narrow (N)

Very Narrow (VN)

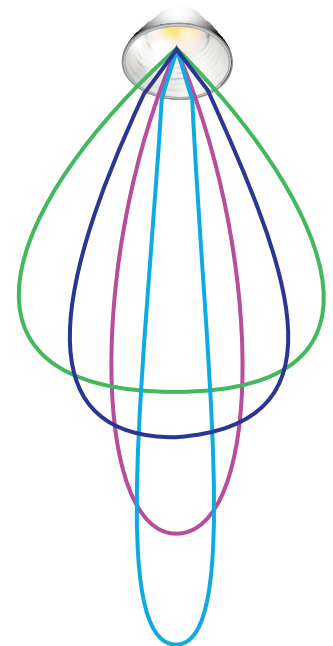

Model Number	Input	Delivered lm/W	Delivered Lumens	HD eq	Max Amps	PF @ 277V	THD @ 277V	# of LED Arrays	Heat Sink Diameter
REC-20W-40K	21	112	2,352	100MH	0.21	0.91	13%	1	3.75"
REC-45W-40K	45	88	3,960	175MH	0.45	0.91	13%	1	5.75"
REC-90W-40K	90	88	7,920	250-400MH	0.90	0.91	13%	1	7.75"

